


Ceiling Mounted Monoblock unit



Technical Specifications

Model	CTCHA405DF
Condensing Type	Air cooled
Voltage	380-400V/50hz
Motor (HP)	4.0HP
Capacity (W)	6135
Power rate (KW)	3.2
Current (A)	7.5
Working temp	-5°C ~ +5°C
Ambient	+35°C
Panel Thickness	100mm
Room Volume (Min / m ³)	65
Room Volume (Max / m ³)	120
Refrigerant	R404A
Defrost	Hot Gas Defrost
Compressor	Danfoss MLZ030T4LC9A
Fan Condensor (No. x Ømm)	1 x 400
Fan Evaporator (No. x Ømm)	1 x 350
Air Flow Condensor (m ³ / hr)	3000
Air Flow Evaporator (m ³ / hr)	1350
Air Throw Evaporator (mtrs)	8
Shell model	R4
Dimension L*D*H (mm)	1320 x 1070 x 600
Weight (Kg)	130

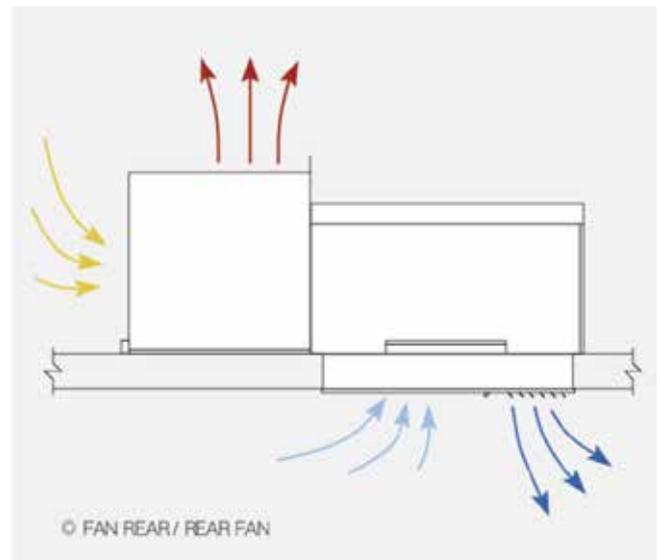

PRODUCT INFORMATION



Compressor performance curve data

Condensing Temperature (°C)	Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)
		±5%	±5%	±5%
40°C	10	15.490	2.998	5.59
	5	13.140	2.998	5.62
	0	11.070	2.997	5.62
	-5	9.264	2.995	5.61
	-10	7.687	2.990	5.58
45°C	10	14.320	3.335	6.00
	5	12.130	3.342	6.04
	0	10.210	3.348	6.05
	-5	8.535	3.352	6.04
	-10	7.074	3.353	6.02

Test Condition: Subcooling 8.3 K, Return Gas 35°C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

Dimensions

